



Mazzei GDT™ Ozone Contacting System

*World Leader
in Mixing and
Contacting
Technologies*

Contact us today.

Mazzei Injector Company, LLC

500 Rooster Drive

Bakersfield, California 93307-9555

TEL 661-363-6500

FAX 661-363-7500

www.mazzei.net



The preferred method for rapid transfer of ozone gas into solution and subsequent removal of undissolved gases.


The Mazzei GDT™ process features a high-efficiency Mazzei Injector to pull ozone gas from an ozone generator into a liquid sidestream and provide initial mass transfer. The two-phase solution then flows to a Flash Reactor for further mass transfer through high velocity mixing, and finally, through a Degas Separator for entrained gas removal. The undissolved gases are released through a Degas Relief Valve, and piped to an ozone destruct unit, for safe venting to the atmosphere. Each system is custom engineered for high mass transfer efficiency and conveniently assembled on a compact skid frame.

Benefits

- ▶ Small footprint
- ▶ 95% or higher ozone transfer
- ▶ Maintains system pressure
- ▶ Low maintenance
- ▶ 316L stainless steel
- ▶ Undissolved ozone processed through destruct unit
- ▶ Field proven technology

System Options

- ▶ Control package
- ▶ Ozone generator
- ▶ Ambient ozone alarm
- ▶ Dissolved ozone monitor
- ▶ Connection types
- ▶ Skid frame materials



© 2019 Mazzei Injector Company, LLC. MAZZEI®, MIC®, AIRJECTION®, and TRU-BLEND® are registered trademarks of Mazzei Injector Corporation, as is the trade dress of the Mazzei injector under United States Registration No. 3170225. Mazzei products, and processes utilizing those products, are protected under various U.S. and non-U.S. patents and patents pending, including U.S. Patent Nos. 9,744,602; 9,744,502; 9,643,135; 9,643,134; 7,777,664; 7,040,839; 6,890,126; 6,866,703; 6,730,214; 6,193,893.

Mazzei GDT™ Ozone Contacting System


Maximize Ozone Treatment and Performance

The Mazzei GDT™ process maximizes both ozone mass transfer and removal of unwanted entrained gases.

Factors utilized by the GDT Process for Maximizing Transfer Efficiency:

- ▶ High ozone concentration and low gas to liquid ratios
- ▶ Increased pressure for more solubility
- ▶ Aggressive mixing – rapid renewal of the gas/liquid interface

GDT™ Sidestream Process Diagram

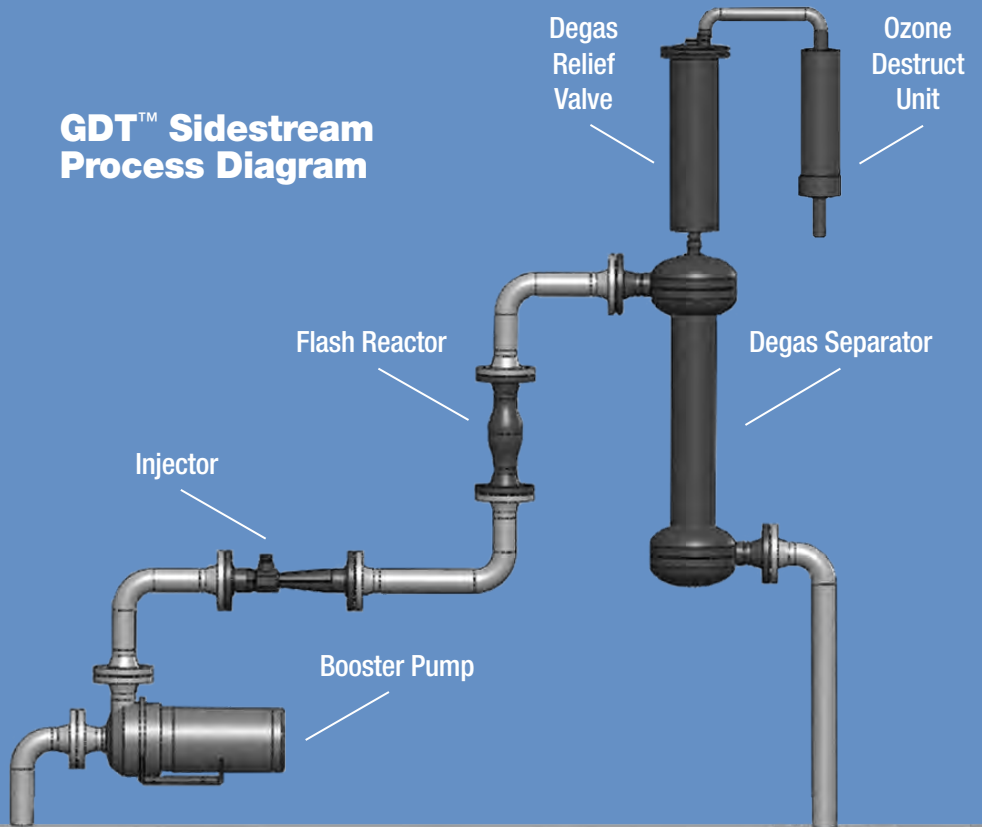

Mazzei®

Contact us today.

Mazzei Injector Company, LLC

500 Rooster Drive

Bakersfield, California 93307-9555

TEL 661-363-6500

FAX 661-363-7500

www.mazzei.net

Mazzei Model No.	Skid Dimensions	Sidestream Flow Range (GPM)	Maximum Ozone Gas Flow Rates	
	H x W x D (in)		5% O ₃ by Wt.	10% O ₃ by Wt.
GDT-07	62" x 33" x 29"	3 - 15	27 g/hr (1.4 ppd)	54 g/hr (2.8 ppd)
GDT-10	62" x 33" x 29"	10 - 25	45 g/hr (2.4 ppd)	90 g/hr (4.7 ppd)
GDT-15	62" x 33" x 29"	30 - 75	135 g/hr (7.1 ppd)	270 g/hr (14.2 ppd)
GDT-20	64" x 31" x 25"	90 - 140	260 g/hr (13.7 ppd)	520 g/hr (27.4 ppd)
GDT-30	82" x 58" x 38"	200 - 300	550 g/hr (29.1 ppd)	1100 g/hr (58.2 ppd)

Notes:

Values in table above are calculated for a main line pressure of 30psig, and a 5psig pressurized gas feed
All information is approximate, actual sizing is to be confirmed by Mazzei