

CONSTRUCTION

Available Material	Polypropylene (PP) - <i>BLACK</i>	Polyvinylidene Fluoride (PVDF) - <i>BLACK & NATURAL</i>
Unit Weight (with box)	4.67 lbs	9.02 lbs
Inlet & Outlet Connections	4" male NPT	
Suction Port Connections	2" male NPT each port	
Maximum Operating Temperature	212° F	
Maximum Operating Pressure (at 68° F)	120 psi	


ACCESSORIES

PART NUMBER	DESCRIPTION
CAP2.0 PVDF	Suction port cap for Model 4091 injectors
CAP2.0 N-PVDF	Suction port cap for Model 4091 injectors
SPSA-2-A.1	Suction port screen assembly with check valve (2" female NPT connection)

CHECK VALVE

INJECTOR MODEL	CHECK VALVE
4091 PP <i>BLACK</i>	NO INTERNAL CHECK VALVE
4091 PVDF <i>BLACK</i>	NO INTERNAL CHECK VALVE
4091 N-PVDF <i>NATURAL</i>	NO INTERNAL CHECK VALVE



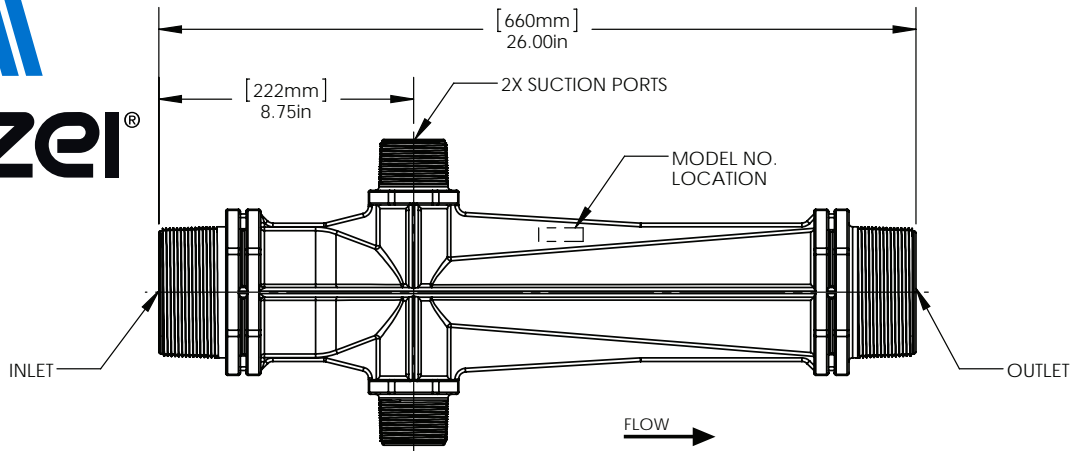

CONSTRUCTION

Available Material	Polypropylene (PP) - <i>GREEN</i>	Polyvinylidene Fluoride (PVDF) - <i>BLUE</i>
Unit Weight (with box)	2.59 kg	4.12 kg
Inlet & Outlet Connections	100 mm male BSPT	
Suction Port Connections	50 mm male BSPT each port	
Maximum Operating Temperature	100° C	
Maximum Operating Pressure (at 20° C)	8.44 bar	

REPLACEMENT PARTS

INJECTOR MODEL	CHECK VALVE
ISO GRPP 4091 <i>GREEN</i>	NO INTERNAL CHECK VALVE
ISO 4091 PVDF <i>BLUE</i>	NO INTERNAL CHECK VALVE

