
### NOTES:

- MATERIAL OF CONSTRUCTION: TYPE 316L, STAINLESS STEEL
- MTR/HEAT NUMBERS ARE PROVIDED FOR ALL MATERIALS AND SHALL MEET APPLICABLE MATERIAL SPECIFICATIONS.
- FLANGE BOLT HOLES TO STRADDLE COMMON CENTERLINES, UNLESS 3. OTHERWISE NOTED.
- MAXIMUM PRESSURE: 150 PSI (10.34 BAR)
- MAXIMUM OPERATING TEMPERATURE: 180°F (82.2°C) 5.
- PRESSURE LOSS: 1 4 PSID (.07 .28 BAR) AT RATED FLOW
- RATED FLOW: 100 300 GPM (23 68 M³/HR) 7.
- 8. EMPTY WEIGHT (DRY): APPROXIMATELY 91 LBS. (42 KG)
- 9. WATER VOLUME: 10 GALLONS (36.7 LITERS)
- INLET/OUTLET CONNECTION: 3.00" DIA., ANSI B16.5, CLASS 150, SCHED. 40, RAISED FACE, WELD **NECK FLANGE**
- 11. VENT CONNECTION: 1.50" DIA., ANSI B1.20.1, FEMALE NATIONAL PIPE THREAD (FNPT)
- FINISH: GLASS BLAST EXTERIOR ONLY
- WELDING JOINTS TO BE COMPLETE PENETRATION, WHERE POSSIBLE.
- DYE PENETRATE TESTING IN ACCORDANCE WITH ASME B31.3 NORMAL SERVICE RECOMMENDATIONS WILL BE PERFORMED ON A MINIMUM OF 20% OF LINEAR LENGTH OF WELDS; OR HYDROSTATIC TESTING WILL BE PERFORMED AS PART OF MAZZEI'S NON-DESTRUCTIVE TESTING PROCEDURE.
- CLEANED FOR PASSIVATION PER ASTM A380 GUIDELINES.
- PASSIVATED PER ASTM A967 SPECIFICATION.
- WELD MAP, NON DESTRUCTIVE TESTING (NDT), CLEANING AND INSPECTION REPORTS TO BE PROVIDED BY MÁZZEI.
- MAZZEI RECOMMENDS INSTALLING THE DEGAS SEPARATOR PER THE **O&M MANUAL GUIDELINES.**


| REVISIONS |                         |           |            |  |
|-----------|-------------------------|-----------|------------|--|
| REV.      | DESCRIPTION             | DATE      | APPROVED   |  |
| NC        | released for submittal. | 1/8/2014  | J. BENNETT |  |
| Α         | REVISED NOTE 4          | 9/10/2015 | J. BENNETT |  |

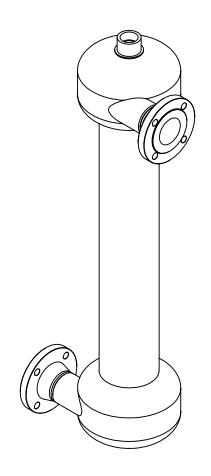

### SUBMITTAL DRAWING

(ISOMETRIC VIEW) (FOR REFERENCE ONLY)

| SUBMITTAL NOTICE  | CONFIDENTIALITY NOTICE   | UNLESS OTHERWISE SPECIFIED                                       | APPROVALS             | DATE     | <b>M</b>       | MAZZEI INJECTOR CO., LLC  |      |
|---|--|--|-----------------------|----------|----------------|---|------|
| ANY RECOMMENDATIONS FOR PRODUCT AND/OR  | THE INFORMATION CONTAINED IN THIS                                    | DIM ARE IN INCHES<br>TOL ON ANGLE ± .1/2°                        | drawn:<br>T. JOHNS    | 1/8/2014 |                | 500 ROOSTER DRIVE BAKERSFIELD, CA 93307<br>PHONE: (661) 363-6500 FAX: (661)363-7500 |      |
| SYSTEM DESIGN, WHETHER CONTAINED IN A DOCUMENT, WITHIN THIS DRAWING, COMMUNICATED BY ELECTRONIC | DRAWING IS THE SOLE PROPERTY OF MAZZEI INJECTOR COMPANY LLC. ANY     | 1 PL ± .125 2 PL ± .060 3 PL ± .030<br>INTERPRET DIM AND TOL PER | K. COBAR              | 1/8/2014 | MOZZCI'        | WWW.MAZZEI.NET  |      |
| MEANS OR GIVEN VERBALLY, ARE INTENDED SOLELY AS GUIDELINES TO ACTUAL SYSTEM DESIGN. SAID        | REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF | ASME Y14.5M-1994   | APPROVED:  J. BENNETT | 1/8/2014 | DE             | EGAS SEPARATOR; DS 300  |      |
| RECOMMENDATIONS ARE BASED UPON INFORMATION SUPPLIED BY OTHERS, THE ACCURACY OF WHICH IS         | mazzei is strictly prohibited.                                       | THIRD ANGLE PROJECTION   | QA:                   |          |                |   |      |
| BEYOND VERIFICATION BY MAZZEI INJECTOR CO. LLC. THEREFOR MAZZEI CANNOT AND DOES NOT WARRANT     |  |  | CUSTOMER APPROVAL:    |          | SIZE: JOB NO.: | DRAWING NUMBER:   | REV: |
| THE SUITABILITY OF ITS PRODUCTS FOR A PARTICULAR  | DRAWING MAY NOT BE PRINTED FULL SIZE                                 | ] <del>(( ))</del> -  -  | CUSTOMER: NA          |          | B NA           | DSF03015AAF000-SUB  | Α    |
| SERVICE NOR THE PERFORMANCE OF ANY SYSTEM CONTAINING COMPONENTS MADE OR SOLD BY MAZZEI.         | DO NOT SCALE   |  |                       | •        | SCALE: NONE    | WEIGHT: 91 LBS SHEET: 1 OF  | )F 2 |

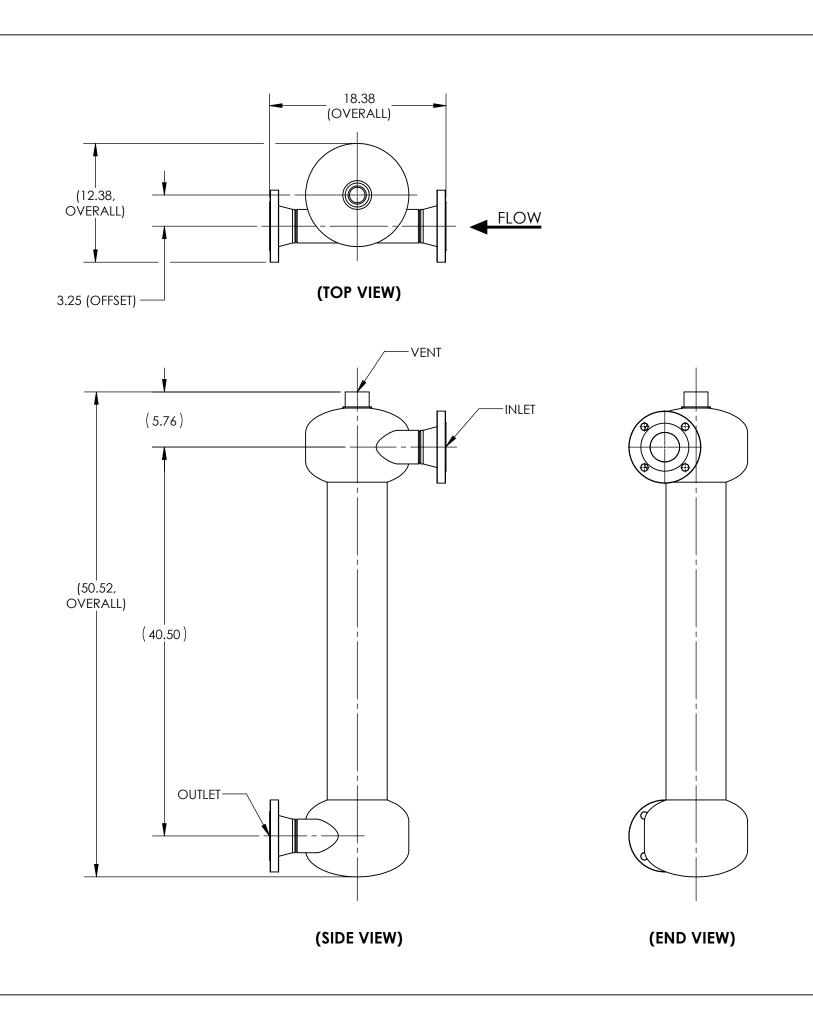



MAZZEI INJECTOR CO., LLC
500 ROOSTER DRIVE BAKERSFIELD, CA 93307
PHONE: (661) 363-6500 FAX: (661)363-7500
WWW.MAZZEI.NET


DEGAS SEPARATOR; DS 300

| SIZE: JOB NO.: |      |         | DRAWING NUMBER:    |    | REV: |
|----------------|------|---------|--------------------|----|------|
| В              | N.A  | 4       | DSF03015AAF000-SUB |    | Α    |
| SCALE:         | 1.10 | WEIGHT: | 91 LRS SHEET:      | 20 | )F 2 |

### NOTES:

- 1. MATERIAL OF CONSTRUCTION: CHLORINATED POLYVINYL CHLORIDE (CPVC)/FIBER REINFORCED POLYMER (FRP)
- 2. MAXIMUM PRESSURE: 80 PSI (5.52 BAR)
- 3. MAXIMUM OPERATING TEMPERATURE: 73°F (22.8°C) @ MAX. PRESSURE
- 4. PRESSURE LOSS: 3 12 PSID (.2 .8 BAR) AT RATED FLOW
- 5. RATED FLOW: 100 300 GPM (23 68 M³/HR)
- 6. EMPTY WEIGHT (DRY): APPROXIMATELY 77 LBS. (35 KG)
- 7. WATER VOLUME: 15.2 GALLONS (57.4 LITERS)
- 8. INLET/OUTLET CONNECTION: 3" NOMINAL DIA., CLASS 150, VAN STONE STYLE FLANGE
- 9. VENT CONNECTION: 2" NOMINAL DIA., CLASS 150, VAN STONE STYLE FLANGE
- 10. FINISH: FIBERGLASS WRAPPED EXTERIOR ONLY
- 11. HIGH FREQUENCY SPARK TEST REPORT OF HOT AIR WELDS CAN BE PROVIDED BY MAZZEI UPON REQUEST.

|      | REVISIONS               |           |            |  |  |  |
|------|-------------------------|-----------|------------|--|--|--|
| REV. | DESCRIPTION             | DATE      | APPROVED   |  |  |  |
| NC   | released for submittal. | 2/19/2015 | J. BENNETT |  |  |  |

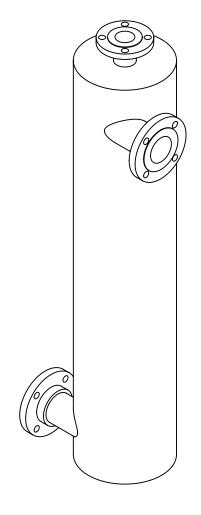

(ISOMETRIC VIEW)
(FOR REFERENCE ONLY)

## **SUBMITTAL DRAWING**

# SUBMITTAL NOTICE ANY RECOMMENDATIONS FOR PRODUCT AND/OR SYSTEM DESIGN, WHETHER CONTAINED IN A DOCUMENT, WITHIN THIS DRAWING, COMMUNICATED BY ELECTRONIC MEANS OR GIVEN VERBALLY, ARE INTENDED SOLELY AS GUIDELINES TO ACTUAL SYSTEM DESIGN. SAID RECOMMENDATIONS ARE BASED UPON INFORMATION SUPPLIED BY OTHERS, THE ACCURACY OF WHICH IS BEYOND VERIFICATION BY MAZZEI INJECTOR CO. LLC. THEREFORE MAZZEI CANNOT AND DOES NOT WARRANT THE SUITABILITY OF ITS PRODUCTS FOR A PARTICULAR SERVICE NOR THE PERFORMANCE OF ANY SYSTEM CONTAINING COMPONENTS MADE OR SOLD BY MAZZEI.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MAZZEI INJECTOR COMPANY LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MAZZEI IS STRICTLY PROHIBITED.

**CONFIDENTIALITY NOTICE** 

DRAWING MAY NOT BE PRINTED FULL SIZE DO NOT SCALE

| Γ | ĺ                          |
|---|----------------------------|
|   | THIRD ANGLE PROJECTION     |
|   | ASME Y14.5M-1994           |
| l | INTERPRET DIM AND TOL PER  |
|   | ALL DIMS ± 1"              |
| l | TOL ON ANGLE ± .50°        |
| 1 | DIM ARE IN INCHES          |
| l | UNLESS OTHERWISE SPECIFIED |

| IIIID AITOLL I KOSLOIIO |
|-------------------------|
|                         |

| APPROVALS               | DATE      |       |
|-------------------------|-----------|-------|
| drawn:<br>T. JOHNS      | 2/19/2015 |       |
| CHECKED:  J. PEREZ      | 2/19/2015 | DES   |
| approved:<br>J. BENNETT | 2/19/2015 |       |
| QA:<br>-                |           |       |
| CUSTOMER APPROVAL:      |           | SIZE: |
| CUSTOMER:               |           | _     |

N/A

# Mazzel\* DESCRIPTION:


# MAZZEI INJECTOR CO., LLC

500 ROOSTER DRIVE BAKERSFIELD, CA 93307 PHONE: (661) 363-6500 FAX: (661)363-7500 WWW.MAZZEI.NET

DEGAS SEPARATOR; DSF03020KAAFID

SIZE: JOB NO.: DRAWING NUMBER:

BN/ADSF03020KAAFID-SUBNCSCALE: NONEWEIGHT:77 LBSSHEET:1 OF 2

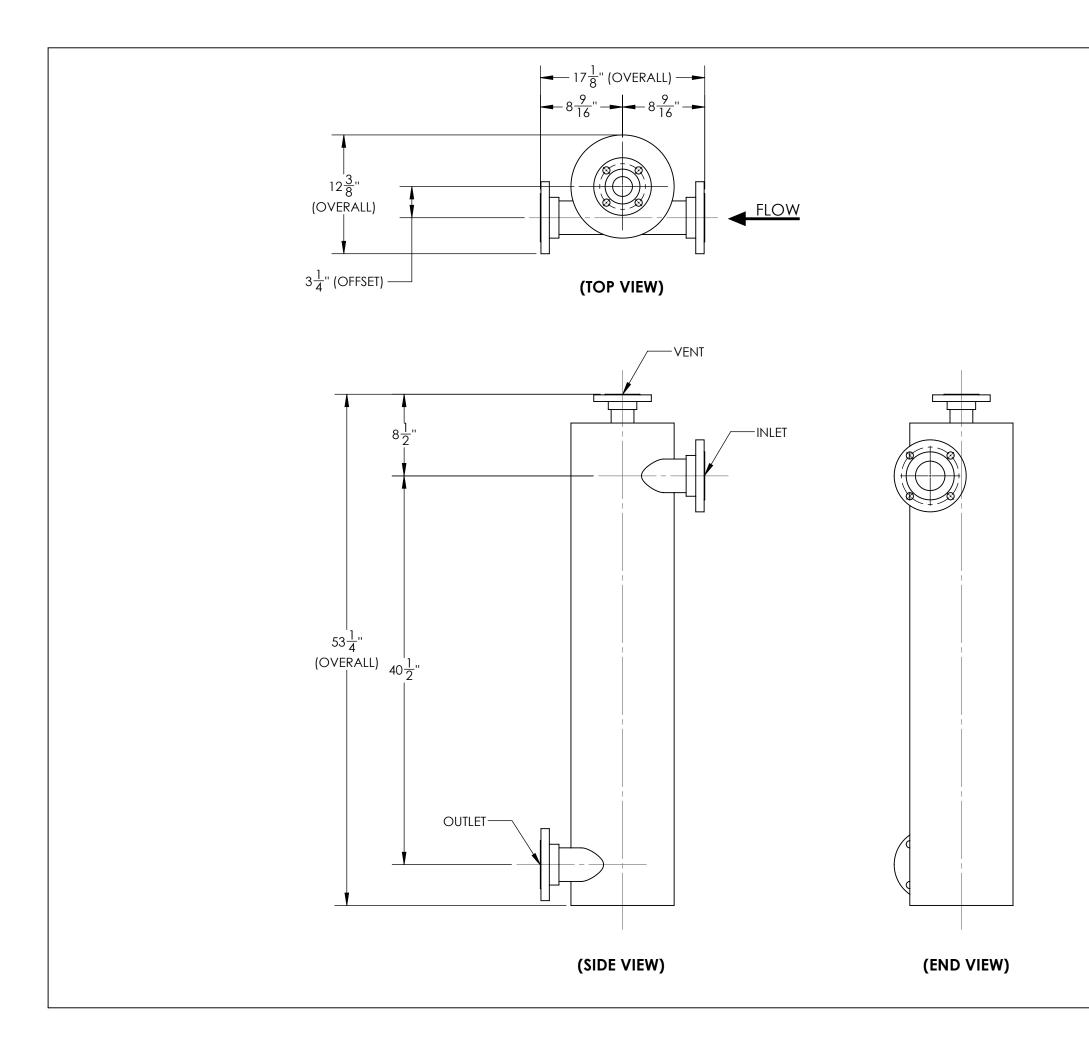



MAZZEI INJECTOR CO., LLC
500 ROOSTER DRIVE BAKERSFIELD, CA 93307
PHONE: (661) 363-6500 FAX: (661)363-7500
WWW.MAZZEI.NET

DEGAS SEPARATOR; DSF03020KAAFID

DRAWING NUMBER: SIZE: JOB NO.: N/A |WEIGHT: B N/ DSF03020KAAFID-SUB 77 LBS SHEET: 2 NC 2 OF 2